




CLOVER INSTRUCTIONS - FREESTAND

All our Clover unit's - 'Single', 'Dual', 'Triple' & 'Quad' - are supplied with an installation 'kit'. This kit enables both you - and the team at Posture Balance™ to identify your Clover for ease of assembly and installation.

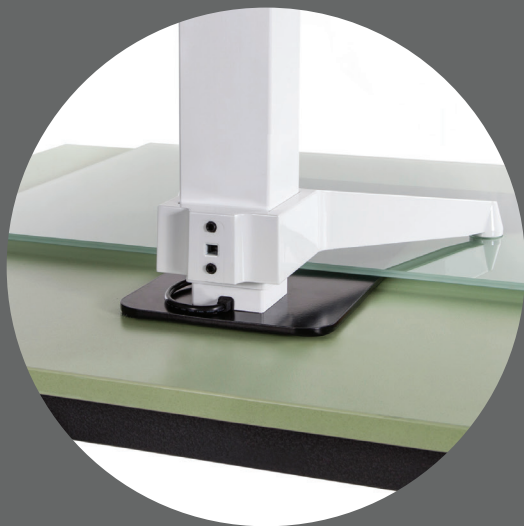


components

① Freestand Column with bolts*



② Freestand Plate



③ Keyboard Platform



④ Dual Monitor Arms



⑤ Single Monitor Arms



⑥ Runner



⑦ Hard Switch



⑧ Top Cap, Allen Keys & Positioning Bracket



⑨ Template



⑩ Electrics/Transformer



⑪ Screws & Spacers



* Please note that the Column is supplied with the Positioning Bracket in its correct place.

clover instructions

HOW TO ASSEMBLE YOUR CLOVER - FREESTAND



Remove the Freestand Plate from box.

Ensure the counter-sunk holes are on the underside (bottom).

Take column from box and remove the 4x screws that been placed into the end of the column.


Position column on to the Freestand Plate, ensuring that the power lead is facing to the rear.

Replace the 4x screws into the column, via the counter-sunk holes in the base of the plate to secure the column to the plate.



Lower the keyboard platform over the top of the column.

Once the platform makes contact with the Positioning Bracket, it is in the correct position.

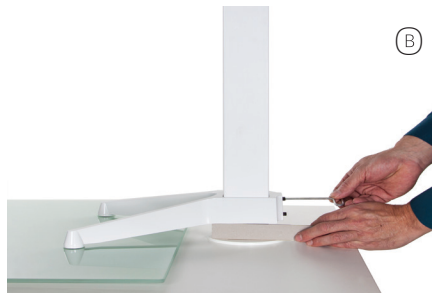

Using the 'L' shape Allen Key, tighten the 2 locking screws at the rear of the bracket.

DO NOT overtighten these screws.



Use the template to set the correct distance between the keyboard platform bracket, & the monitor bracket.

Lower the monitor bracket over the column & lock into position.

DO NOT overtighten these screws.


Place 'Top Cap' on column once completed.

clover instructions

HOW TO ASSEMBLE YOUR CLOVER - ATTACHING THE RUNNER



Remove any existing fittings from the rear of your monitor and locate its fixing points.

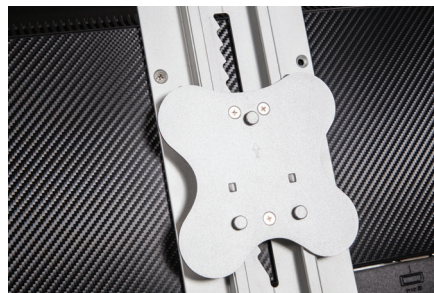

Align the Runner to the fixing points and place the screws into the holes*.

*With the arrow pointing upward.




Secure all points using a screw driver.


Note: You may need to use the spacers if your monitor has an obstruction.

clover instructions


HOW TO ASSEMBLE YOUR CLOVER - MOUNTING YOUR MONITOR
& CONNECTING YOUR CABLES

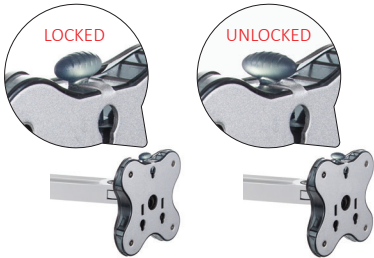

Twist the dial counter clockwise to set the mount in an 'unlocked' mode.

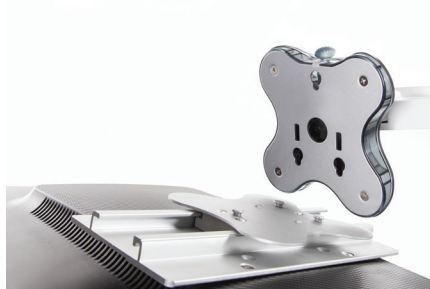

Align the 3 pins of the runner with the 3 holes of the mount.

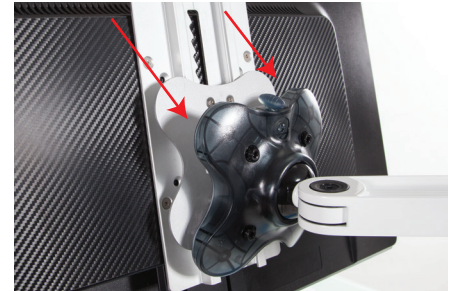

For ease of installation; slide the runner into the mount in a downwards motion.



Once locked, twist dial clockwise to secure.



Power Cable (AC)



Deskline cable (1)
Hardswitch cable (A2)
USB Connection (A1)



Connect the cable connected to the base of the column to the deskline cable (1) that is connected to the transformer.



Return to the underside of the desk and screw the transformer into position.

Connect your Computer, & if downloading the operating software please visit www.posturebalance.com.au

Please note that Clover can either be manually raised or lowered via the hardswitch or by your mouse - using the USB connection.